

ProCleave™ HS

ELECTRONIC FIBER CLEAVER



The ProCleave HS is an advanced electronic fiber cleaver for fibers up to 250 μm . The cleaver is specifically designed for use in production lines where ease-of-use, process speed, and a high production yield are crucial. It is also well suited for R&D environments.

The ProCleave HS utilizes advanced ultrasonic diamond scribe technology to achieve optimal cleave performance and consistency. The cleaver generates very flat end faces, low cleave angles (typical $< 0.5^\circ$) with minimum blade intrusion.


The ProCleave HS has a clamping mechanism designed for ease of use and with process speed in mind. It is powered by an external power supply or the built-in rechargeable battery.

The ProCleave HS is used together with a fiber holder from a fusion splicer (adapted for all main splicer brands*).

* Fiber holder not included in the delivery kit.

Key Features

- Electronic cleave process for optimal cleave quality and repeatability
- Designed for fiber cladding diameters from 80 to 250 μm
- Low cleave angles with very flat end faces, typical $< 0.5^\circ$ (125 μm , SMF28)
- Can be powered with battery or external power supply
- Delivered with platform that support Fujikura, Fitel and 3SAE fiber holders

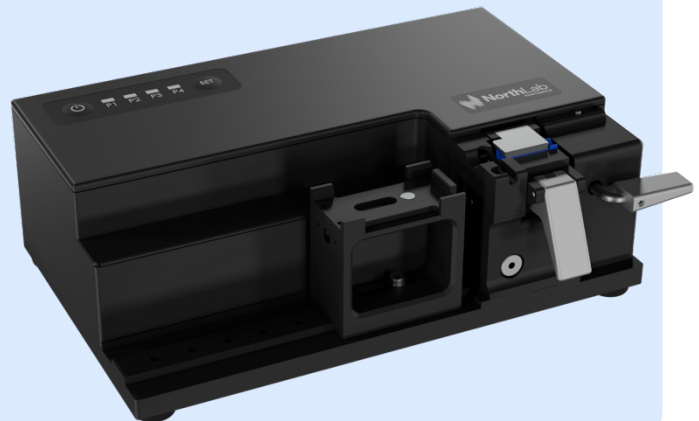

Technical Specifications


Dimensions:	150(W) x 94(D) x 47(H) mm 150(W) x 107(D) x 51(H) mm (incl. lever and rubber feet)
Weight:	0.91 Kg
Power Source:	Built-in rechargeable Li-Ion battery or external power supply (100 - 240 V AC, 50/60 Hz)
Supported fiber cladding:	80 – 250* μm
Supported fiber coating:	Depending on fiber holder
* Fiber cladding diameters from ~180 – 250 μm may require optional LD Clamp (CL-03-01002)	

ProCleave™ HS


ELECTRONIC FIBER CLEAVER




Product	Part #	Qty
NorthLab ProCleave™ HS	CL-03-01000	
Standard Package		
Power Supply + Cord EU/US	CL-90-90005	1
Tool Kit	CL-03-01001	1
USB 2.0 Cable	N/A	1
User's Manual & PC Software (USB-stick)	N/A	1
Optional Components		
Spare Diamond Blade	CL-90-90001	
LD Clamp for fiber cladding ~180 – 250 µm	CL-03-01002	



Interferometer image approx. 0.15 °



Magnified end face

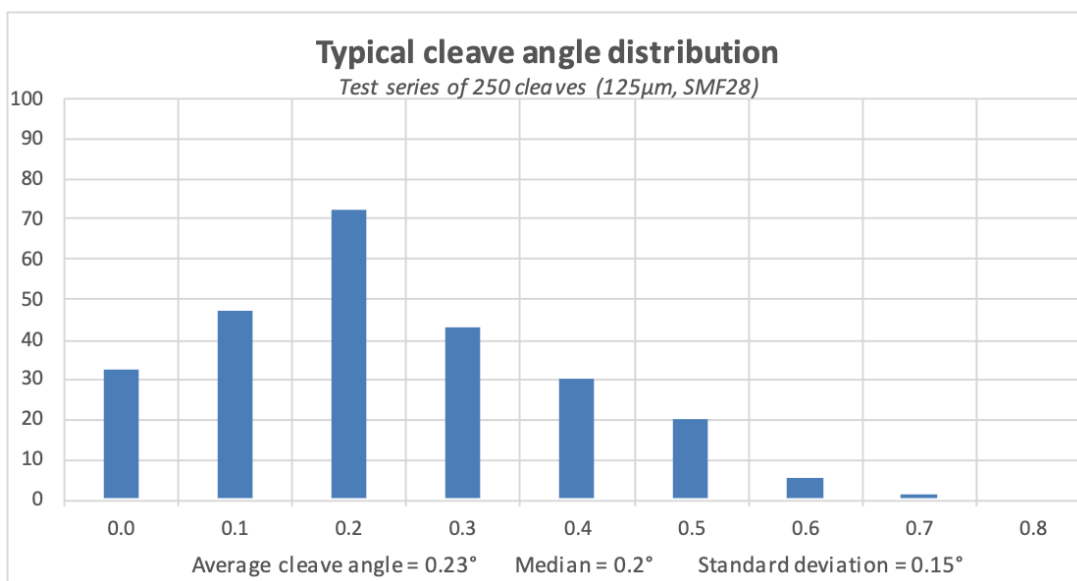

Information is subject to change without notice. Last update: 2026-03-10.